

SURFACE 360

TEKNOTIMBER


20MM EXTERNAL LEVATO MONO PAVER

4
COLOURS






1
FINISH

1
SIZES

- TeknoTimber is a popular choice for those who like conventional timber decking, but require a material of zero maintenance, high slip resistance and a longer life span.
- Ribbed surface.

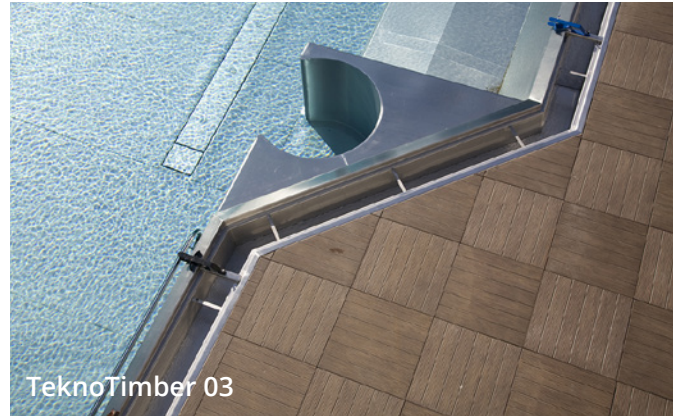

COLOURS ▾




Slight Variation

Please Note: Tones in these images are indicative. Real samples can be requested for free.

TECHNICAL INFORMATION

	FORMAT SIZE	FINISH	THICKNESS	SLIP RESISTANCE
1	600 x 600	Ribbed	20mm	R11 (A, B & C)


Sizes:



Please Note: All sizes are nominal. If required, please contact us for exact working sizes. All porcelain tiles have rectified edges.

BREAKING STRENGTH	ISO 10545 - 4	>10.000N	
POINT LOAD	EN 12825	CENTRE	600x600 9,60kN
		SIDE CENTRE	6,50kN
		DIAGONAL	8,19kN
RESISTANCE TO ABRASION	ISO 10545 - 6	<150mm ³	

For a Raised Installation:
Required pedestal positions based on size.



Please Note: For voids in excess of 100mm, Surface 360 recommends using our Impact Control Membrane (ICM). To be applied to the underside of paving, in all affected areas.